


PIZZI

PIZZI 4700

Mini Portable BT Speaker

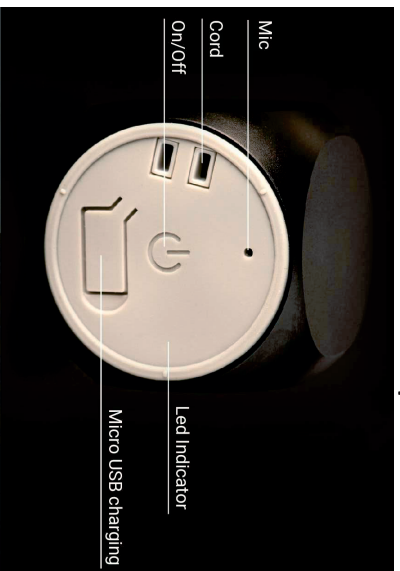

www.pizzi-speaker.com

Charging the battery

1. Insert the charging cable into the Micro USB input port, connect the USB plug into 5V USB power terminal.
The charging LED indicator will turn on.
2. After charging completed, the LED indicator will turn off.
Note: When music sound becomes smaller and you hear the warning tone , please charge this speaker in time.

Bluetooth pairing for music / phone call / camera remote shutter

1. a. Turn on the speaker by pressing " Ⓞ " button for 3 seconds. The speaker will have a voice prompt and blue indicator will flash.
b. Stereo mode (only for two speakers):
Power on two PIZZI. Double press " Ⓞ " on one. PIZZI Connected prompts are heard once the speakers are paired successfully, then main speaker will blink and vice speaker will light on. After the first pairing, the PIZZI will connect automatically when you turn them both on.
2. Turn on your device and activate the Bluetooth function.

3. Search for Bluetooth pairing name" PIZZI " and click to pair, the speaker will pair automatically and the speaker will have a voice prompt.
Then, you can play music or just need to press " Ⓞ " button to answer the call when the call is coming.

4. Long press " Ⓞ " button to turn off the speaker.
Note: Turn off main speaker, two speakers will turn off together, turn off vice speaker, main speaker still can work.

Transfer between selfie mode and keyboard mode

Double click " Ⓞ " button of the speaker to transfer the selfie mode and keyboard mode(you will hear a sound which like taking picture or keyboard). Under selfie mode, one click to take a photo when open Camera APP. (If close Camera APP, continuous click to up volume.) ; Under keyboard mode, one click to Play / Pause.
Note: It is keyboard mode when open the speaker by default.

TWS stereo mode

2 speakers pairing (TWS stereo mode)
First, turn off the Bluetooth on the mobile.
Turn on the two PIZZI speakers
(the leds on both units will flash)
Double-click the "🔊" key on your speaker
(the unit that is already connected to your mobile device).
Wait 5 seconds for the beep sound, the two PIZZI units
will now work in stereo
Turn on the BT on mobile and turn on music,
both speakers will play the music.
After the initial coupling, the PIZZI will automatically
connect to both as soon as you turn them on.

Specifications

Power Rating	3W
Frequency Response	20HZ-20KHZ
THD	<1%
S/N	≥80DB
Speaker Parameter	4Ω 3W diameter 31mm
Battery	3.7V/ 300mAh
Bluetooth Version	Bluetooth V5.0
Product Size	35x35X34mm
Product Weight	57.6g